

WSN Technology Enabled Real Time Aquaculture Monitoring System

¹Gudivada Shanmukha Lakshmi Narasimha,²Borra Srinivas,³Burla Venkata Saran Teja,⁴Gelle Bhanu

Prakash,⁵T. Siva Leela

^{1,2,3,4}U. G Student, Dept ELECTRONICS AND COMMUNICATION ENGINEERING,
St. Ann's College of Engineering and Technology, (Autonomous)Chirala, Bapatla Dist,
Andhra Pradesh – 523187, India

⁵Assistant Professor, Dept ELECTRONICS AND COMMUNICATION ENGINEERING,
St. Ann's College of Engineering and Technology (Autonomous), Chirala, Bapatla Dist,
Andhra Pradesh – 523187, India

Abstract: Aquaculture faces tremendous problems because water quality changes because of variation in environmental conditions. Estimate water characteristics such as pH, turbidity, conductivity, and others, as fluctuations in these values are critical for aquatic life. At present, water parameters are detected by a chemical tester at the laboratories. As a result, it is a time-consuming manual method with a tiresome process. The quality of water should be monitored in real-time for that purpose Arduino based water quality monitoring has been proposed. The architecture of a smart aqua monitoring and control system that analyses water quality and adjusts water parameters in real-time is discussed in this report. This system consists of different sensors that measure water quality parameters such as pH, conductivity, the muddiness of water, and temperature. The measured values from the sensors are processed by a

microcontroller and various control signals are given to maintain the best water parameters for the fish life. Then the measured values are given to the user's mobile app through the cloud. This system ensures there is perfect living qualities in water for fishes and maintains it by controlling the water parameters.

KEYWORDS - pH, Temperature, Internet of Things (IoT), Wi-Fi module, Turbidity

INTRODUCTION

Wireless sensor networks are becoming popular among the research community for their low-cost design and simple bar form factor. Wireless technology developments have improved large-field data gathering and reliability in hostile environments. Moreover, the research community focuses on the form factor and expansion of the wireless node involving in remote process monitoring and automation. Internet of

Things (IoT) is the combination of a physical object, controller, sensor, actuators, and the Internet. Industry 4.0 is dependent on the Internet of Things (IoT). Actuators and sensors are devices that interact with actual objects in the real world and collect data from their surroundings. Actuators and sensors, process the electrical input and transform it into tangible action. IoT devices generate a large amount of important and useful data, which must be saved, categorized, and analyzed. The architecture is made up of three layers: The Physical Layer, Network Layer, and Application Layer are the three layers that make up the Internet. In the physical layer, sensors measure the data from the outside environment and turn it into valuable data.

After data collection, time-sensitive data got to be processed immediately. Otherwise, the info has got to be deeply processed and analyzed to be stored within the Cloud to avoid network clutter. In the network layer, the data are collected from various sensors to be aggregated and converted to digital streams for processing. For data processing, Data Acquisition System (DAS) is the most suitable process to sample the signals from the real-world objects to convert the results into digital numeric values that can be manipulated with the computer. The working rule of

knowledge acquisition is to convert analog waves into digital values for processing. Through Wi-Fi, WLANs, and other technologies, the Internet gateway gets aggregated and digitized data. As a result, the data is frequently safely kept on a server or in the cloud for analysis. When IoT is combined with sensors and actuators, it forms part of the Cyber-Physical Systems (CPS) category, which includes smart grids, virtual power plants, smart homes, smart classrooms, intelligent transportation, smart hospitals, smart traffic, and smart cities. Standard protocols and networking technologies are primarily used in IoT. RFID, NFC, low-energy Bluetooth, low-energy wireless, low-energy radio protocols, LTE-A, and WiFi-Direct are some of the technologies and protocols utilized in IoT. In addition, the expenses of chemical reagents are typically expensive, resulting in a rise in the test cost. The researchers are experts in building a real-time water quality monitoring system that can detect solvents and pollutants in real time and upload real-time data to a database utilizing the internet of things (IoT) for real-time water quality analysis.

RELATED WORK

Several researchers have developed advanced techniques for water quality monitoring using modern technologies.

Image processing-based systems analyze fish behavior and movement patterns to identify changes in water quality through fuzzy inference methods. Wireless sensor network-based approaches employ sensors and ZigBee communication modules to measure physicochemical parameters such as pH, temperature, conductivity, and flow rate, enabling remote monitoring. Sensor cloud-based solutions have been introduced to provide cost-effective monitoring in rural areas by collecting, storing, and analyzing water quality data through cloud platforms. More recently, Internet of Things (IoT)-based systems have integrated sensors, microcontrollers, and wireless communication technologies to support real-time water quality monitoring and data transmission. Although these systems improve monitoring efficiency, many lack automated control features, creating the need for smart systems that can both monitor and regulate water quality parameters.

LITERATURE SURVEY

A. Use of image processing technology for water quality monitoring system

The system was created utilizing image processing and auto-recognition of fish gestures in water bodies using fuzzy inference. First the fixing of the image

background model using W4 method was done, then deducted the background to acknowledge the fish profile. Once the centre gravity point of a fish profile is determined, real-time fish characteristics such as position, movement track, and speed can be retrieved. This information are going to be given because the input of fuzzy inference system, through appropriate rules in analyzing; the output value are often obtained. In this study, Zebra fish, Common Goldfish have been taken as the study objects via different devices into agent to observe the fish.

B. Smart sensors for real-time water quality monitoring using zigbee

The system is skilled to live the physiochemical parameters of water quality, like flow, temperature, pH, conduction, red ox potential. These physiochemical parameters are wont to identify water pollutants in rivers, lakes etc. The sensors are connected to a microcontroller-based evaluation node that processes and analyses the data. ZigBee receiver and transmitter modules are utilised to connect the measuring and notification nodes in this design. ZigBee receiver and transmitter modules are utilised in this system to communicate between the measurement and notification nodes. When the parameters reach dangerous levels, the warning hub shows

the sensors' readings and emits a sound. Each component of the monitoring system has been subjected to several qualification tests. The sensors operate within their precise parameters. The menstrual node sends data through ZigBee to the notification node, which displays the audio and visual data. The result shows that the approaches the power to read physiochemical parameters, and is capable of processing, transmission, and exhibiting the readings.

C. Water quality monitoring for rural areas-a sensor cloud based economical project

This paper highlights the whole water quality monitoring methods, sensors, embedded design, and knowledge dissipation procedure, role of state, network operator and villagers in ensuring proper information dissipation. It can explore the Sensor Cloud-domain. While automatic water quality improvement is not yet possible, smart use of technology and cost-effective approaches can help enhance water quality and public awareness. of five years. The time series monthly data is collected on stock prices for sample firms and relative macroeconomic variables for the period of 5 years. The data collection period is ranging from January 2010 to Dec 2014.

Monthly prices of KSE -100 Index is taken from yahoo finance.

EXISTING METHOD

Traditional water quality monitoring systems rely on manual collection of water samples and laboratory-based chemical testing to measure parameters such as pH, temperature, turbidity, and conductivity. These methods provide accurate results but require significant time, labor, and operational costs. Since water samples are tested periodically rather than continuously, sudden changes in water quality may go undetected, potentially affecting aquatic life. In many aquaculture farms, monitoring is performed manually by operators, making the process inefficient and prone to human error. Furthermore, conventional systems do not provide real-time alerts or automatic corrective actions when water parameters exceed acceptable limits. These limitations highlight the need for an automated and intelligent monitoring system capable of continuously observing water quality and ensuring a healthy environment for fish and other aquatic organisms.

SYSTEM ARCHITECTURE

The proposed system consists of 3 major stages.

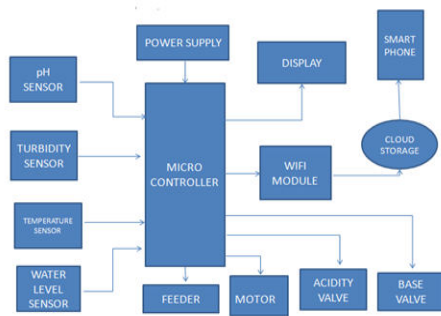


Fig.1 System Architecture

MODULE DESCRIPTION

The Sensing stage consists of following sensors.

1. pH sensor: If chemical effluents from the industries are let into water bodies the pH value of the water changes counting on sort of chemical i.e. Acidic or basic. The pH sensor measures the extent of pH in water by measuring the activity of hydrogen ions in water. Normally, the fishes can live in a pH range of 6 to 8. If the value of the pH goes below 6, the solution becomes acidic and opens the base valve. If the value of pH goes above 8, the water becomes basic and therefore the acidity valve are going to be open and make it to the range which is suitable for aquatic life.

2. Temperature sensor: Microbial activities can cause the temperature of water to rise, which is one of the factors that determines cleanliness. The water temperature is measured by the temperature sensor. Fishes survive within the temperature

range of 21°C to 33°C. If temperature goes beyond threshold range, motor gets activated and pumps the water.

3. Turbidity sensor: It measures the quantity of sunshine that's scattered by suspended solids within the water. As the amount of total suspended solid increases, the waters turbidity level increases.

4. Water level sensor: It determines the extent of water. If water level is low, motor gets activated to pump the water to the specified level.

5. Feeder: feeder is used for maintaining the diet of fishes.

The signal received by these sensors is applied to Arduino board which is that the controlling and computing a part of the system. The computing stage entails comparing the sensor's sensed data to a predetermined threshold value. When the sensed value differs from the edge value, the communication stage sends a message to the authorised person. Communication stage involves Wi-Fi module. supported the messages received the concerned person can initiate the working of motor from anywhere for changing the water, or the circuit will automatically take actions like adding Acid/Base and feeding the fish.

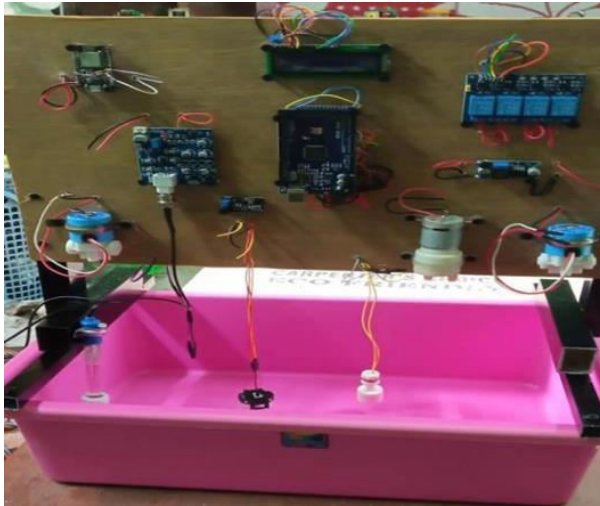


Fig.2.Hardware implementation

RESULTS AND DISCUSSION

For the simulation purpose, we've used Proteus 8 professional. we will test our circuit after drawing it using Proteus's simulation feature. Simulating can be done in two ways: run the simulator or advance frame by frame. The "Run simulator" option simulates the circuit at a traditional speed (If the circuit isn't heavy). "Advance frame by frame" option advances to subsequent frame and waits till you click this button for subsequent time. this will be useful for debugging digital circuits. you'll also simulate microcontrollers. The microcontrollers which may be simulated include PIC24, dsPIC33, 8051, Arduino, ARM7 based microcontrollers. You'll either download the Proteus compilers or use a special compiler to dump the hex files into Proteus. It can even interact in real-time with the simulation using switches, resistors, LDRs, etc. Virtual

voltmeters, ammeters, oscilloscopes, logic analyzers, and other instruments are also available.

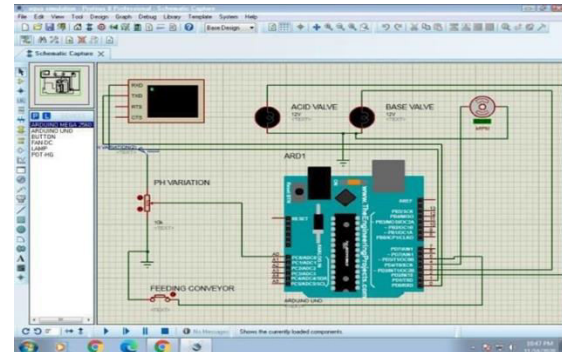


Fig.3.Circuit Diagram

CONCLSUION AND FUTURE SCOPE

Smart aquaculture monitoring and system is predicated on Internet of Things. The technology is extremely adaptable and cost-effective. It's a real-time system that measures numerous parameters concerning the water and makes sure the water maintains the standard for the lives of fishes. The system gives the knowledge of the standard parameters measured to user through cloud. The system can monitor water quality automatically, and it's low in cost and doesn't need individuals on duty. It's a flexible system, due to which just by replacing the sensors and by making some changes within the pc code, the system are often wont to measure another parameter of water. The system is reliable and straightforward to take care of and it are often extended to live pollution also. By

effectively using the proposed system, one can save time and price also can be reduced.

REFERENCES

1. Raju, K. R. S. R., & Varma, G. H. K. (2017). KnowledgeBased Real-Time Monitor System for Aquaculture Using IoT. 2017 IEEE 7th, International Advance Computing Conference (IACC). doi:10.1109/iacc.2017.0075.
2. Suresh Babu Chandanapalli, Sreenivasa Reddy E and Rajya Lakshmi D, "Design and Deployment of Aqua Monitoring System Using Wireless-Sensor Networks and IAR-Kick," Journal of Aquaculture Research & Development, Volume 5 • Issue 7 • 1000283
3. Daudi S. Simbeyei and Shi Feng Yang, "Water Quality Monitoring and Control for Aquaculture - Based on Wireless Sensor Networks," JOURNAL OF NETWORKS, VOL. 9, NO. 4,
4. Anand Nayyaar, Er. Vikram Puri, "IoT Based Smart Sensors Agriculture Stick for Live Temperature and Moisture Monitoring using Arduino, Cloud Computing&Solar Technology" May 2016.
5. Apurva C. Pusahkar, Vijay S. Gulhane, "Implementation of Wireless-Sensor Network for Real Time Monitoring of Agriculture", International research journal of engineering and technology (IRJET). Volume: 03 issue: 05 | May-2016
6. Mrs.T.Vineela, J. NagaHarini, Ch.Kiranma, G.Harshitha, B.AdiLaksh, "IoT Based Agriculture Monitoring and Smart Irrigation System Using Raspberry Pi", International Research Journal of Engineering and Technology (IRJET). Volume: 5 Issue: 1 | Jan 2018
7. Akanksha Purohit, Ulhas Kumar Gokhale, "Real Time Water Quality Measurement System based on GSM," IOSR Journal of Electronics and Communication Engineering, Vol. 9, Issue 3, PP 63-68.
8. Babburi, S. Lightweight Distributed Provenance Framework for Edge and IoT Data Systems.
9. Gaddam, S. From Fixed Specifications to Self-Adapting Systems: A Machine Learning Perspective on Software Engineering.
10. Immadi, S. K. (2025). Optimizing ERP for Human Capital

- Management. Applied Research for Growth, Innovation and Sustainable Impact, 377–384. <https://doi.org/10.1201/9781003684657-63>
11. Reddy, S. K. R. Developing a Modular AI Framework to Enhance Scalability and Personalization in Next-Generation Reward Platforms.
 12. Poojari, R. Frameworks for Data Management and Lineage in Large-Scale Healthcare Data Systems.
 13. Mahimalur, R. K., Vasgam, M., & Manoharan, D. Devops Lifecycle Management And Cloud Migration Assessments: A Security-Driven CICD Perspective.
 14. Viswanathan, V. Generative AI for Smarter Workforce Planning and Enterprise Resource Decisions.
 15. Gajula, S. (2026, March). Two Pillars of Banking Intelligence: A Comparative Analysis of AI Techniques for Fraud Prevention and Churn Mitigation. In 2026 14th International Symposium on Digital Forensics and Security (ISDFS) (pp. 1-6). IEEE.
 16. Maturi, S. Y. (2023). Crowdsourced frontier: Unveiling autonomous adversarial cybercapabilities via open AI competition. International Journal of Intelligent Systems and Applications in Engineering, 11(1s), 275–284.
 17. Venkata Ramana, P. (2024). AI-driven predictive analytics in ERP systems for proactive supply chain optimization. International Journal of Research in Information Technology and Computing, 8(4).
 18. Srikanth Kavuri. (2025). AI-DRIVEN TEST AUTOMATION FRAMEWORKS: ENHANCING EFFICIENCY AND ACCURACY IN SOFTWARE QUALITY ASSURANCE. International Journal of Applied Mathematics, 38(10s), 699–710. <https://doi.org/10.12732/ijam.v38i10s.990>
 19. Gajula, S., & Margam, M. (2026). A Secure and Scalable Cloud-Based Banking Service Model Leveraging AI and Advanced Cyber Security. 2026 IEEE 5th International Conference on AI in Cybersecurity (ICAIC), 1–5. <https://doi.org/10.1109/icaic67076.2026.11395704>
 20. Shashank, A. (2025). AI-Enhanced ETL Processes: Leveraging Artificial Intelligence for Optimized Data Integration Systems. Journal Of Multidisciplinary, 5(8), 219-225.

21. Kandula, S. T. R., Susarla, R. S., & Boyapati, P. K. (2025, July). Enhanced Cyber Security Using Global Local Artificial Neural Network Based Intrusion Detection in Big Data Environment. In 2025 IEEE 4th World Conference on Applied Intelligence and Computing (AIC) (pp. 426-431). IEEE.
22. Boyapati, P. K. Building a centralized data operations hub for healthcare enterprise integration. IJSAT-Int. J. Sci. Technol. 16 (2). <https://doi.org/10.71097/IJSAT.v16.i2.3219>